


Basic machine

- City Ranger 2260

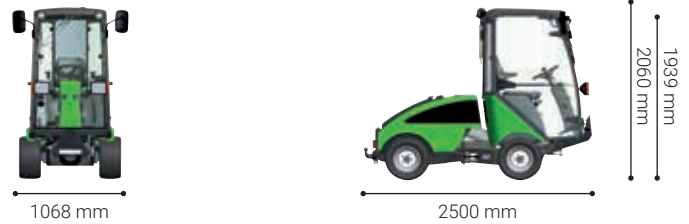

Standard equipment:

- Lights** EU standard driving lights plus two extra lights positioned high on the front (ideal for snow sweeping) and an extra light on the back. Only standard on basic machines with cabin.
- Coupling** Coupling TÜV approved.

Extra equipment (options):

- Air condition (AC)** AC can be installed without having to modify the machine dimensions. The height of the machine stays less than two metres and can still easily be stored in garages or go into underground parking areas. Shared between eight adjustable air ducts, the AC ensures pleasant cabin conditions.
- Seat** This seat option offers several adjustment possibilities and air suspension for extra comfort. There is two different variants - one with nappa and one with fabric.
- Cabin** ROPS approved cabin including lights, mirrors, beacon and heating.
- Roll bar** ROPS approved roll bar for basic machines without cabin. Including lights and mirrors.
- Reversing alarm** An alarm when reversing increases the safety in city centres and pedestrian areas. 108 dB(A).
- Rear view camera & colour screen** Rear view camera with a colour screen ensures good visibility in confined spaces, where the operated path can be inspected. It also improves safety in pedestrian zones.
- Radio** Bluetooth or DAB+ radio with bluetooth including headset.
- Working light** Front mounted LED working light provides a wide bright light improving the driver's view of the terrain.
- Numberplate kit** The front mounted numberplate holder including integrated LED flash.
- Top filter** For extra protection against overheating of the engine it is recommended to equip your City Ranger 2260 with a top filter when mowing the grass.
- Anti-corrosion treatment** The anti-corrosion treatment of the basic machine is recommended when operating in the winter season.
- Colour changes** The standard green colour can be changed to the desired RAL colour for your specific needs.

Technical specifications

Dimensions		
Length	mm	2500
Width	mm	1068
Height with cabin / roll bar (ROPS)	mm	1939 / 2060
Weights & other data		
Weight with cabin / roll bar (ROPS) ¹⁾	kg	940 / 910
Payload with cabin / roll bar (ROPS)	kg	670 / 700
Gross vehicle weight	kg	1610
Allowed axle load, front	kg	900
Allowed axle load, back	kg	900
Max. permitted trailer weight without brakes	kg	750
Max. combined weight without brakes	kg	2050
Max. permitted trailer weight with brakes	kg	1500
Max. combined weight with brakes	kg	2500
Performance		
Turning circle - kerb to kerb	mm	3280
Turning circle - inside	mm	1200
Operating speed, max.	km/h	20
Noise level		
Passing (Outside - 2009/63/EC)	dB(A)	81
Operators seat (Inside - 2009/76/EC)	dB(A)	88
Engine		
Model	Kubota WG-972-G-E4	
EU norm	Stage V	
Engine power	hp/kW	33 / 24
Fuel tank capacity (petrol)	l	45
Fuel consumption (EN 15429-2)	l/h	6,9
CE certified according to EU directive		

¹⁾ Includes: 75 kg operator and 90% fuel capacity.

