

Basic machine

- City Ranger 2260

Standard equipment:

Tyres 20 x 10-10 / 6 layers	An all-round tyre that can be used all year round. The large width of the tyre ensures minimal surface pressure.
Drive	Permanent hydrostatic 4-wheel drive. Pure hydraulic-driven utility machine only requiring minimal maintenance.
Joystick	Multi-function joystick
Regulation of brush speed	Speed regulation of front brushes, snow sweeper and weed brush.
Lights and mirrors	EU standard driving lights plus two extra lights positioned high on the front (ideal for snow sweeping) and an extra light on the back. Only standard on basic machines with cabin. Mirrors are mounted on the side of the cabin. Models without a cabin are fitted with stop and turn signals at the rear of the machine.
12 V socket	For mobile phone charger.
Trailer hitch	Ball hitch and electric plug for trailer. TÜV approved (acc. ECE R55).
Weight transfer	Weight transfer on front lift.
Seat	Mechanically suspended COBO seat with nappa.
Change of attachments	Quick-shift change of attachments - no tools required (1 min.).
Colour	Green RAL6018.


Extra equipment (options):

Air condition (AC)	AC can be installed without having to modify the machine dimensions. The height of the machine stays less than two metres and can still easily be stored in garages or go into underground parking areas. Shared between eight adjustable air ducts, the AC ensures pleasant cabin conditions.
Seat	This seat option offers several adjustment possibilities and air suspension for extra comfort. There is two different variants - one with nappa and one with fabric.
Cabin	ROPS approved cabin including lights, mirrors, beacon and heating.
Roll bar	ROPS approved roll bar for basic machines without cabin. Including lights and mirrors.
Reversing alarm	An alarm when reversing increases the safety in city centres and pedestrian areas. 108 dB(A).
Rear view camera & colour screen	Rear view camera with a colour screen ensures good visibility in confined spaces, where the operated path can be inspected. It also improves safety in pedestrian zones.
Radio	Bluetooth radio with USB and AUX.
DAB+ radio	DAB+ radio with Bluetooth, USB and AUX.
Working light	Front mounted LED working light provides a wide bright light improving the driver's view of the terrain.
Numberplate kit	The front mounted numberplate holder including integrated LED flash.
Top filter	For extra protection against overheating of the engine it is recommended to equip your City Ranger 2260 with a top filter when mowing the grass.
Anti-corrosion treatment	The anti-corrosion treatment of the basic machine is recommended when operating in the winter season.
Colour changes	The standard green colour can be changed to the desired RAL colour for your specific needs.



Basic machine

- City Ranger 2260

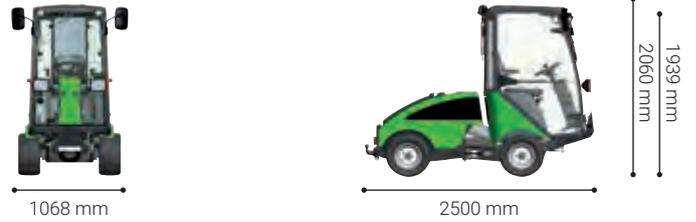

Technical specifications

Dimensions

Length	mm	2500
Width	mm	1068
Height with cabin / roll bar (ROPS)	mm	1939 / 2060

Weights & other data

Weight with cabin / roll bar (ROPS) ¹⁾	kg	940 / 910
Payload with cabin / roll bar (ROPS)	kg	670 / 700
Gross vehicle weight	kg	1610
Allowed axle load, front	kg	900
Allowed axle load, back	kg	900
Max. permitted trailer weight without brakes	kg	750
Max. combined weight without brakes	kg	2050
Max. permitted trailer weight with brakes	kg	1500
Max. combined weight with brakes	kg	2500

Performance

Turning circle - kerb to kerb	mm	3280
Turning circle - inside	mm	1200
Max. speed	km/h	20

Noise level

Passing (Outside - 2009/63/EC)	dB(A)	81
Operators seat (Inside - 2009/76/EC)	dB(A)	88

Engine

Model	Kubota WG-972-G-E4	
EU norm	Stage V	
Engine power	hp/kW	33 / 24
Fuel tank capacity (petrol)	l	45
Fuel consumption (EN 15429-2)	l/h	6,9

CE certified according to EU directive

¹⁾ Includes: 75 kg operator and 90% fuel capacity.

