


Rotary/mulch mower 1600

- City Ranger 2260

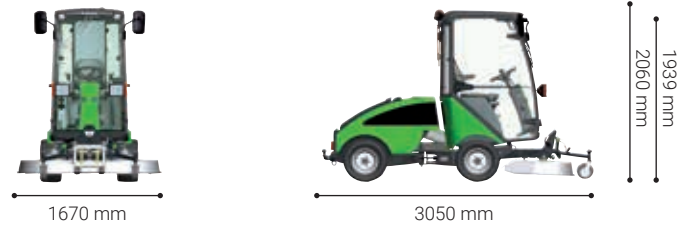

Standard equipment:

- Tilting frame** The mower can tilt up and rest on two support wheels making cleaning and mowing easy.
- Floating function** After lifting the mower it quickly returns to the floating position.

Extra equipment (options):

- Top filter** For extra protection against overheating of the engine it is recommended to equip your City Ranger 2260 with a top filter when mowing the grass.
- Mulch mower kit** The rotary mower can be changed into a mulch mower with a cover placed inside the same mowing deck. Mulching creates fine trimmings, which supply the soil with natural nutrients and reduces the need of fertilisers.

Technical specifications

Dimensions		
Length	mm	3050
Width	mm	1670
Height with cabin / roll bar (ROPS)	mm	1939 / 2060
Storage dimensions		
Length	mm	1240
Width	mm	1670
Height	mm	570
Weight		
Weight (rotary mower)	kg	170
Performance		
Ground clearance below mower	mm	90
No. of mower blades	pcs.	3
Cutting speed (tip speed)	m/sec.	80
Cutting width	mm	1610
Adjustable cutting height	mm	30-90
Theoretical mowing area - rotary	m ² /h	20800
Theoretical mowing area - mulch	m ² /h	16000
Max. recommended operation speed		
Rotary mower *	km/h	13
Mulch mower (shorter grass) *	km/h	10
* Depends on grass and height		
Noise level		
Noise level - outside LwA (2000/14/EC)	dB(A)	105
CE certified according to EU directive		

