


# Salt and sand spreader

## - City Ranger 2260

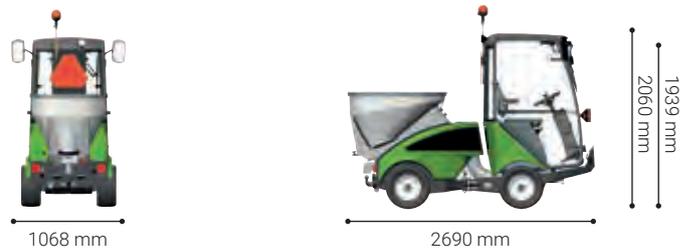

### Standard equipment:

- Durable material**      Produced in stainless steel this spreader has a high durability. It has two motor for individual adjustments of the spreading disc and the stirrer for optimized spreading. It has been optimized with rubber sealings for a tighter fit. 91 kg.
- Stirrer**                The stirrer prevents blocking, crushes lumps and ensures precise and uniform spreading - and thereby even thawing of the ground. Made of hardened Hardox steel the stirrer fingers are extremely robust.
- Material storage**      There is space for extra bags of salt and sand on top of the hopper grate, enabling the operator to fill the salt and sand spreader on site. Please note the maximum loading capacity.
- Stand**                    A stand for attaching/detaching is delivered with the spreader as standard. The stand has wheels, making it easy to move the spreader into storage without heavy lifting.
- Start/stop function**    The start/stop function ensures that the spreading follows the motion of the vehicle. All spreading stops when the vehicle stops moving.

### Extra equipment (options):

- Tarpaulin cover**      A cover keeps the material dry and thereby indirectly improve the spreading accuracy.
- Number plate kit - rear**    The rear mounted number plate holder is recommended when salt and sand spreader is mounted in case that the machine is to be used in public areas (according to national laws).
- Anti-corrosion treatment**    The anti-corrosion treatment will extend the life of the attachment.

### Technical specifications

<b>Dimensions</b>		
Length	mm	2690
Width	mm	1068
Height with cabin / roll bar (ROPS)	mm	1939 / 2060
<b>Storage dimensions</b>		
Length with stand	mm	1250
Width	mm	880
Height with stand	mm	1290
<b>Weights</b>		
Weight with cabin <sup>1)</sup>	kg	1052
Payload with cabin	kg	558
Weight (spreader)	kg	91
Weight - stand	kg	31
<b>Spreader</b>		
Volume	l	240
Spreader load, max.	kg	330
Loading height	mm	1290
<b>Performance</b>		
Spreading width	mm	1000-5000
Operating speed	km/h	1-20
<b>Material amount per m<sup>2</sup></b>		
Salt <sup>2)</sup>	g	5-125
Sand <sup>2)</sup>	g	5-50
<b>CE certified according to EU directive</b>		

<sup>1)</sup> Includes: salt and sand spreader, 75 kg operator and 90% fuel capacity.

<sup>2)</sup> Depending on spreading material, width & conditions.

