


Snow plough

- City Ranger 2260

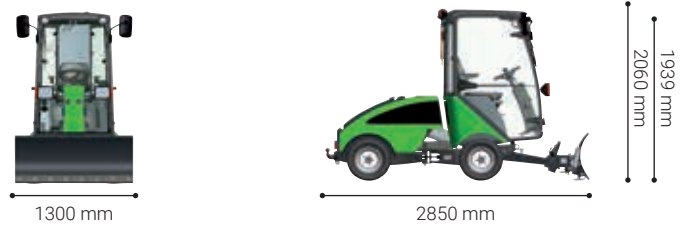

Standard equipment:

- Hydraulic angle adjustment** The snow plough angle can be adjusted from the controls inside the cabin, making it easy for the operator to adjust the blade when needed.

- Safety tilt system** When operating in deep snow there is a risk of hitting obstacles. The safety tilt function reduces the risk of damages both to the plough and surroundings.

- Rubber scraper edge** 100 mm high, 26 mm thick and 1300 mm wide rubber scraper. The scraper edge can be used on two sides giving double usage and extended lifetime.

- Floating skids** The 2 skids are hight adjustable and ensures that the blade follows ground variations.

- Adjustable weight distribution** For optimum functionality as well as minimum wear of the attachment.

Technical specifications

Dimensions		
Length	mm	2850
Width	mm	1300
Height with cabin / roll bar (ROPS)	mm	1939 / 2060
Storage dimensions		
Length	mm	515
Width	mm	1300
Height	mm	545
Weight		
Weight (snow plough)	kg	66
Performance		
Clearing width - straight	mm	1300
Clearing width - inclined	mm	1130
Ground clearance below scraper	mm	420
Operating speed	km/h	1-20
Handling snow depth up to	mm	350
Turning angle		30°
Theoretical performance	m ² /h	26000
CE certified according to EU directive		

