


Snow sweeper

- City Ranger 2260

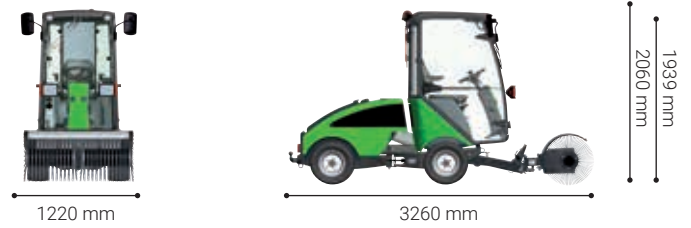

Standard equipment:

- Trapeze mounting** The trapeze-mounting ensures the snow sweeper remains clear of the wheels of the utility machine at all times, whatever the angle. The snow sweeper automatically turns with the utility machine - always sweeping in front of the wheels of the utility machine.

- Reverse rotation function** Reversing the brush rotation ensures that the operator can sweep material when reversing out of an alley or parking spot, which ensures an excellent result.

- Adjustable speed** The rotation speed can easily be adjusted from the cabin to match the need for sweeping.

- Support stand** A support stand with a wheel is built in to the snow sweeper for easy storage.

- Adjustable weight distribution** For optimum functionality as well as minimum wear of the attachment.

Extra equipment (options):

- Extended brush guard** Attaching a brush guard extends the snow sweeper cover, which minimises the snow whirling up on the front wind-screen. Furthermore, the guard makes it easier to control the direction of swept sand and gravel during summer operation. This can be retrofitted on existing snow sweepers as well.

Technical specifications

Dimensions		
Length	mm	3260
Width	mm	1220
Height with cabin / roll bar (ROPS)	mm	1939 / 2060
Storage dimensions		
Length	mm	820
Width	mm	1220
Height	mm	650
Weight		
Weight (snow sweeper)	kg	104
Performance		
Clearing width - straight	mm	1220
Clearing width - angled 25°	mm	1150
Ground clearance below brush	mm	420
Brush diameter Ø	mm	550
Operating speed	km/h	1-15
Theoretical sweeping capacity	m ² /h	18300
Handling snow depth up to	mm	250
Brush speed	rpm	0-240
Turning angle		25°
CE certified according to EU directive		

